

# alpine


by lamparke —  
walk on art



a quite foundation,  
**for bold spaces**

B  
V  
G

# designed for living



**true-to-wood charater**

experience surfaces that capture the essence of real wood.

soft matte finishes, natural grains, and nuanced tones that bring depth, warmth, and authenticity to every space.

each detail is carefully composed to echo the quiet beauty of timber.

**balanced proportions. effortless appeal.**

advanced coating with exceptional **water resistance**



**36h**  
SPILL PROTECT

hydrophobic coating technology is applied to the joints, enhancing the locking system's water resistance and preventing moisture intrusion.

# discover the collection.

enjoy everyday living with a floor that feels closer to nature. crafted with precision, select designs are developed using high-definition scans of real wood—capturing every grain, texture, and subtle detail with remarkable clarity.

the result is a surface that feels natural, looks authentic, and fits seamlessly into your space.



easy to maintain



easy to install



scratch resistant



compatible with underfloor heating



residential warranty 20 years



1 box :  
10 pcs., 26.00 ft<sup>2</sup>



1220 x 198 x 8mm



**36h**  
SPILL PROTECT



for intensive use  
class 32 - AC4




4 bevels



**25121**  
bloom



**25122**  
tawny

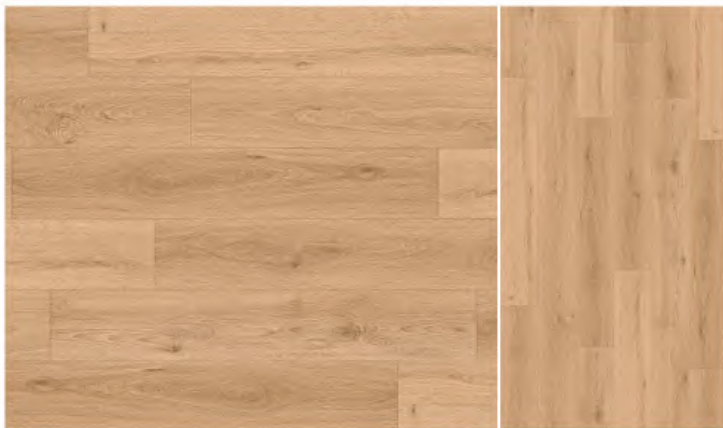


**25123**  
mink





**25124**  
creek

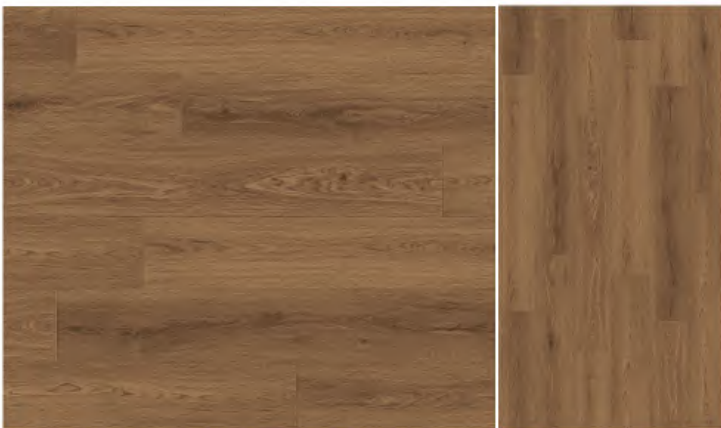


**25125**  
cove




**25126**  
twill




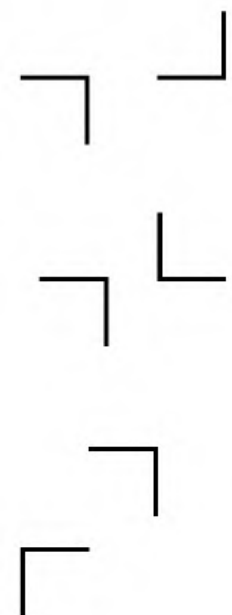

**25126**  
twill

**25125**  
cove

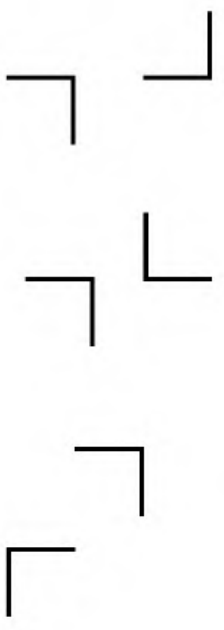


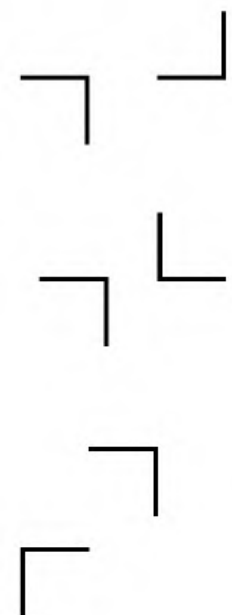


**25124**  
creek



**25123**  
mink

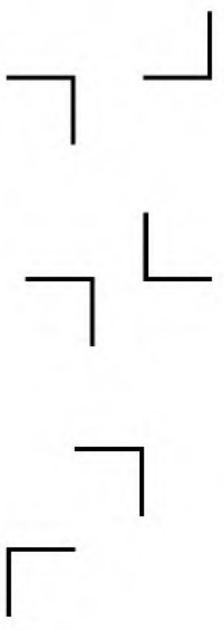


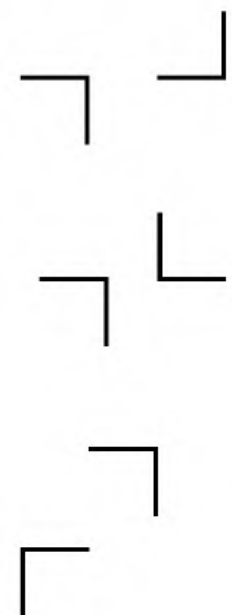

**25122**  
tawny



**25121**  
bloom

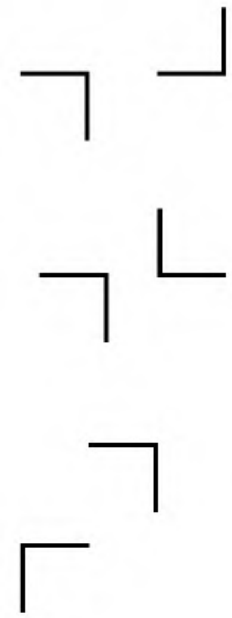

version 01/2025

	contains	m <sup>2</sup>	ft <sup>2</sup>
<b>1 pack alpine</b>	10 planks	2.42 m <sup>2</sup>	26.00 ft <sup>2</sup>

### product specifications

dimensions	1220 x 198 mm
total thickness	08 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years*
Commercial warranty	3-5 years*

\*conditions apply

### composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

### test results

abrasion resistance	EN13329	AC4 (IP≥4000)
impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
thickness swelling	24336 EN13501-1	≤ 18%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	E1
slip resistance	EN438	DS
density	EN16581 EN425	>850 kg/m <sup>3</sup>
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg		no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance		0,08 m <sup>2</sup> K/W – suitable for floor heating/cooling.

