

by lamparke
walk on **art**

herringbone
laminated



hb s4



classic lines,
contemporary rhythm



timeless elegance.

where legacy walks the room.

once gracing the grand halls of castles and manor houses,
herringbone was never just a pattern—
it was a symbol of timeless elegance.

today, it steps into the present with poise,
finding home in modern spaces,
yet never losing its noble charm.

hb s4 is where tradition meets a bold wink—
a floor that's both **classy and a little sassy**,
crafted to be the centerpiece,
whether in a living room or a luxury lounge.

grace your office, hotel suite, or fine dining space
with a touch of patterned poetry.

with a **commercial usage** class of 32,
abrasion class 4,
and a **20 year** residential warranty—
this is elegance built to last,
even where footsteps never pause.




small in form. bold in spirit.

where pattern meets poetry.

step into timelessness with hb s4,
a modern ode to the beloved herringbone—
reimagined in five distinct tones
that whisper character, depth, and quiet drama.

each plank, slender and deliberate,
echoes the grace of old-world parquet,
while its e.i.r. surface brings the grain to life—
knots, lines, and textures you don't just see,
you feel.

finished with syncro,
this is not gloss, not matte—
but something softer, deeper,
a surface that plays with light
and never repeats itself.

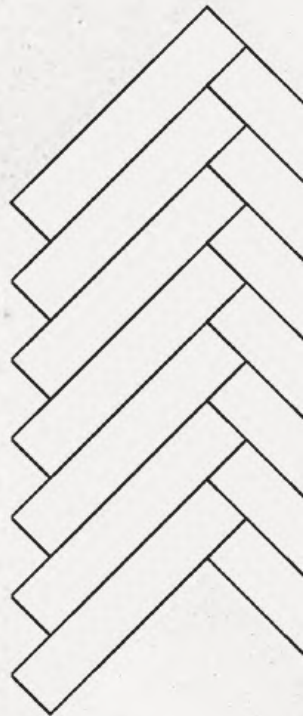



fast instalation

Pre-attached in production Ready to install out of the box, no additional sound underlay is needed



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.



healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality



herringbone
laminate

discover the collection.



for intensive use
class 32 - AC4



4 levels



eir



all year
comfort



20 years*

601 x 101 x 8 mm

1 box (A & B):
36 pcs., 23.72 ft²

a palette for every story.

choose from a thoughtfully balanced range of shades,
each one waiting to become part of your space.



whether it's the quiet calm of surry,
the bold spirit of dorset,
or a medley all your own—
your floor will reflect not just your style,
but your story.

and with hues drawn from nature's softer side,
every choice brings a sense of warmth
that lingers long after the light has changed.




hb s4 | 2022 kent

standard plank box
8 x 101 x 606 mm 36 pcs | 23.72 ft²

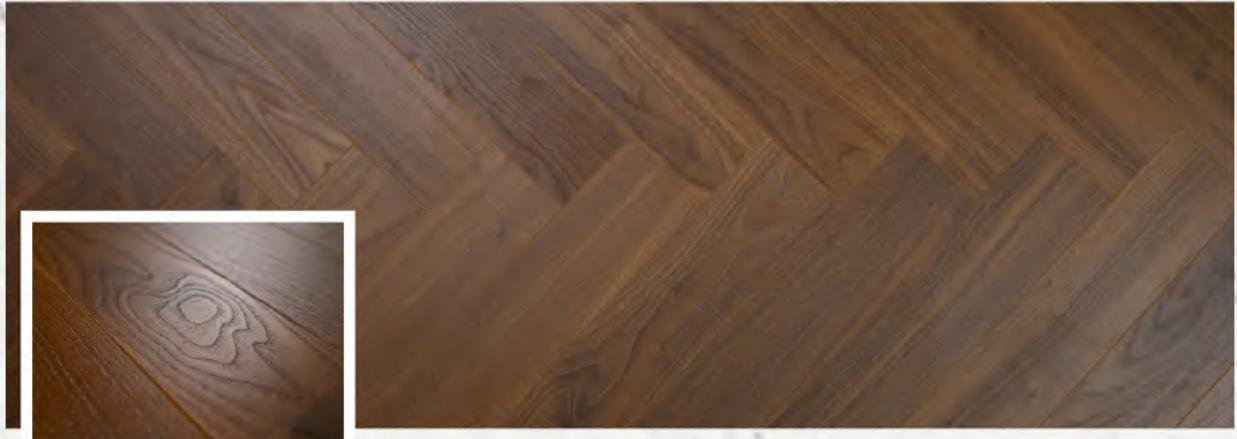



hb s4 | 2203 surrey

standard plank box
8 x 101 x 606 mm 36 pcs | 23.72 ft²

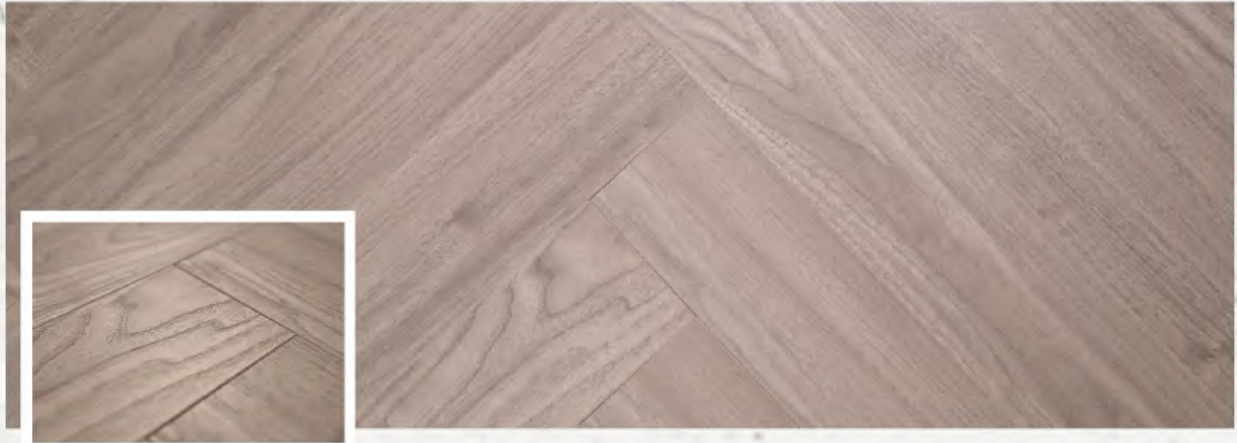


hb s4 | 2008 devon

standard plank box
8 x 101 x 606 mm 36 pcs | 23.72 ft²

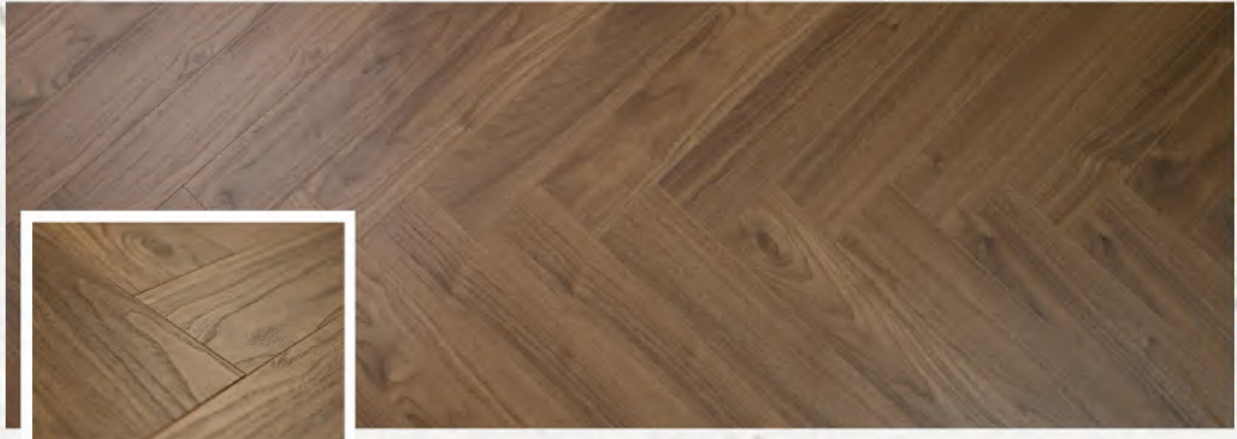



hb s4 | 0521 sussex


standard plank box
8 x 101 x 606 mm 36 pcs | 23.72 ft²



hb s4 | 2012 dorset

standard plank box
8 x 101 x 606 mm 36 pcs | 23.72 ft²

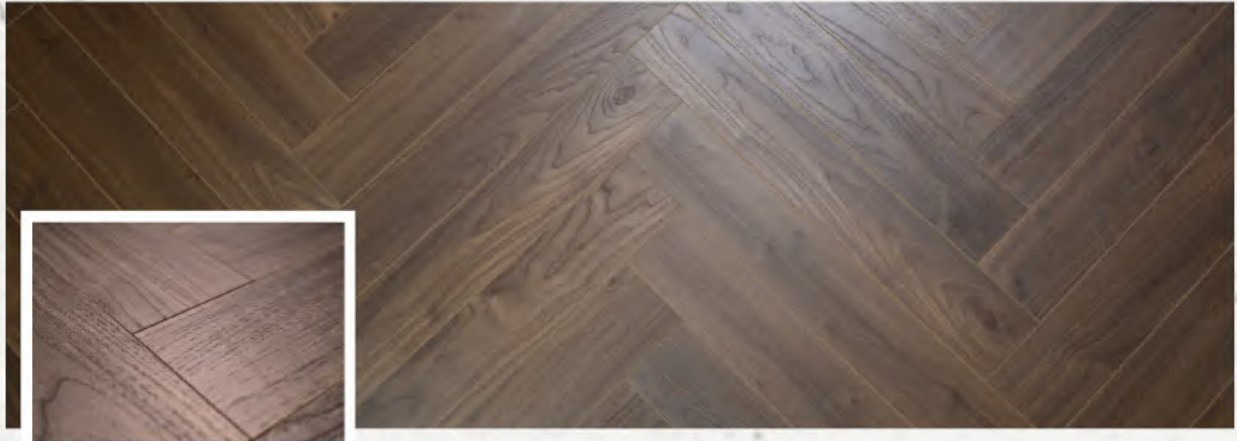


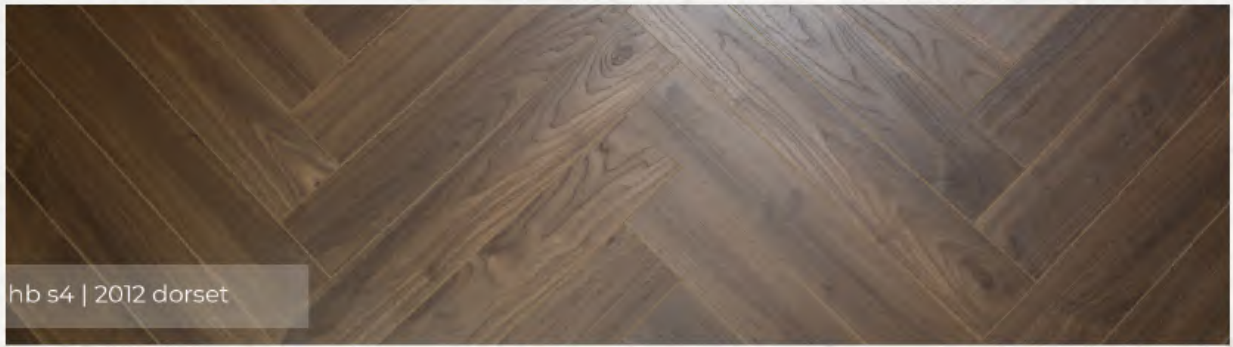


hb s4 | 2012 dorset




hb s4 | 0521 sussex

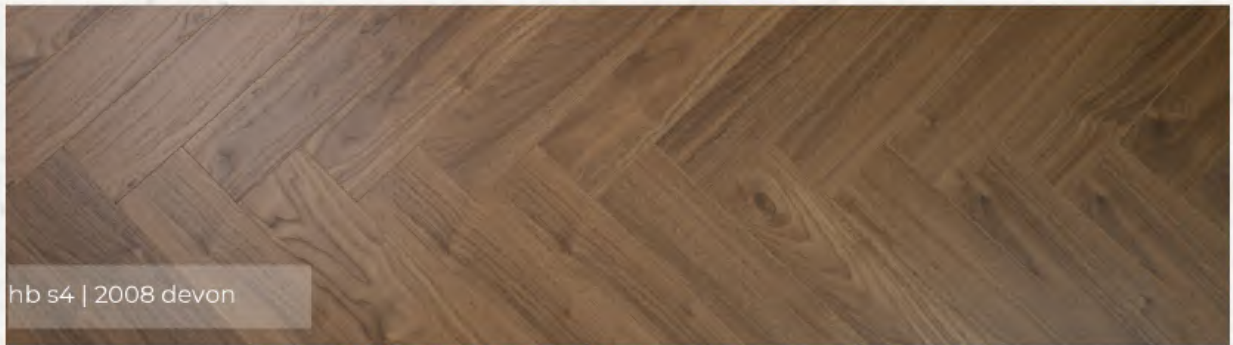

hb s4 | 2008 devon

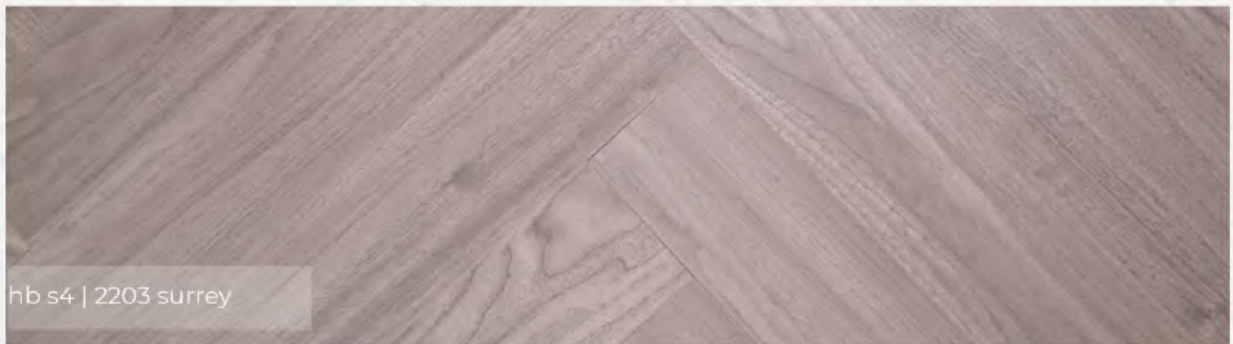

hb s4 | 2203 surrey

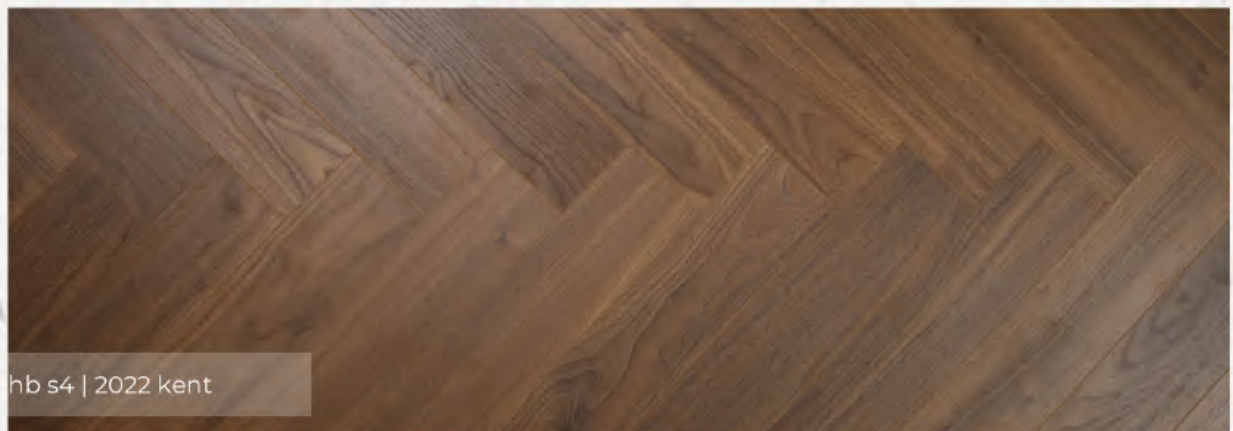

hb s4 | 2022 kent

hb s4

by lamparke _____

technical data.

version 01/2025

	contains	m ²	ft ²
1 pack hb s4	36 planks	2.204 m ²	23.72 ft ²

product specifications

dimensions	606 x 101 mm
total thickness	08 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years*
Commercial warranty	3-5 years*


*conditions apply

composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC4 (IP≥4000)
impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
thickness swelling	24336 EN13501-1	≤ 18%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	E1
slip resistance	EN438	DS
density	EN16581 EN425	>850 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg		no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance		0,08 m ² K/W – suitable for floor heating/cooling.



laminat.