

by lamparke

walk on art

herringbone
laminated



hb s6



old-world charm.
new-age performance

AC5
30 Yrs.
warranty*

36h
SPILL PROTECT
hydrophobic coating

B V G

timeless elegance.



history has a way of leaving its mark.

long before open plans and modern skylines,
herringbone defined spaces meant to impress—
floors that spoke quietly of taste, power, and
permanence.

that legacy hasn't been rewritten.

it's been refined.

hb s6 brings an iconic layout into today's world,
tailored for contemporary interiors that value
character as much as comfort.

the look is composed, the presence unmistakable

—

from refined homes to statement workspaces,
from boutique hotels to intimate dining rooms,
this is a floor that anchors the room without
overpowering it.

engineered for demanding environments,
hb s6 carries a commercial **class 33** rating,
abrasion resistance class 5,
and the confidence of a 30-year warranty*

*conditions apply




small in form.
bold in spirit.

where pattern meets poetry.

each plank, slender and deliberate,
echoes the grace of old-world parquet,
while its e.i.r. surface brings the grain to life—
knots, lines, and textures you don't just see,
you feel.

finished with syncro,
this is not gloss, not matte—
but something softer, deeper,
a surface that plays with light
and never repeats itself.

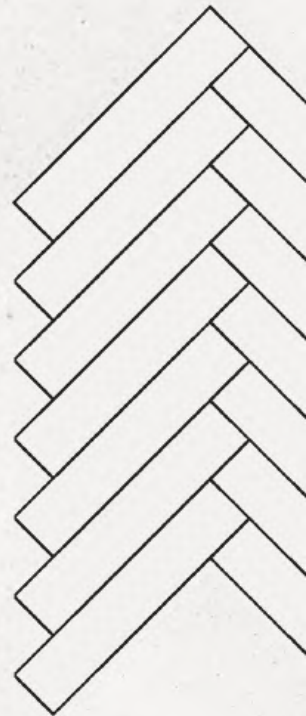



fast instalation

Pre-attached in production Ready to install out of the box, no additional sound underlay is needed



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.



healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality

advanced coating with exceptional **water resistance**



36h
SPILL PROTECT

hydrophobic coating technology is applied to the joints, enhancing the locking system's water resistance and preventing moisture intrusion.



herringbone
laminate

discover the collection.

color begins the conversation.

a curated selection of tones,
designed not to match trends,
but to shape the atmosphere of a room.

rooted in nature's quieter expressions,
these shades bring an easy warmth—
the kind that settles in,
remaining present long after the day moves on.



for intensive use
class 33 - AC5

4



4 bevels



eir



all year
comfort



30 years*

600 x 100 x 8 mm





1 box (A & B):
30 pcs. | 19.38 ft²



hb s6 | 6954 canyon clay


standard plank box
8 x 100 x 600 mm 30 pcs | 19.38 ft²

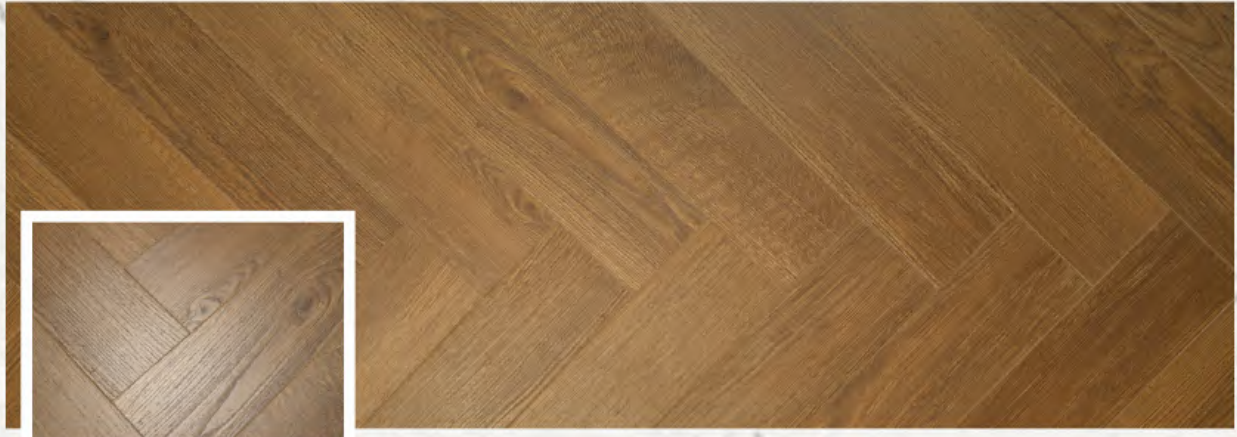

hb s6 | 6955 blush copper

standard plank
8 x 100 x 600 mm


box
30 pcs | 19.38 ft²

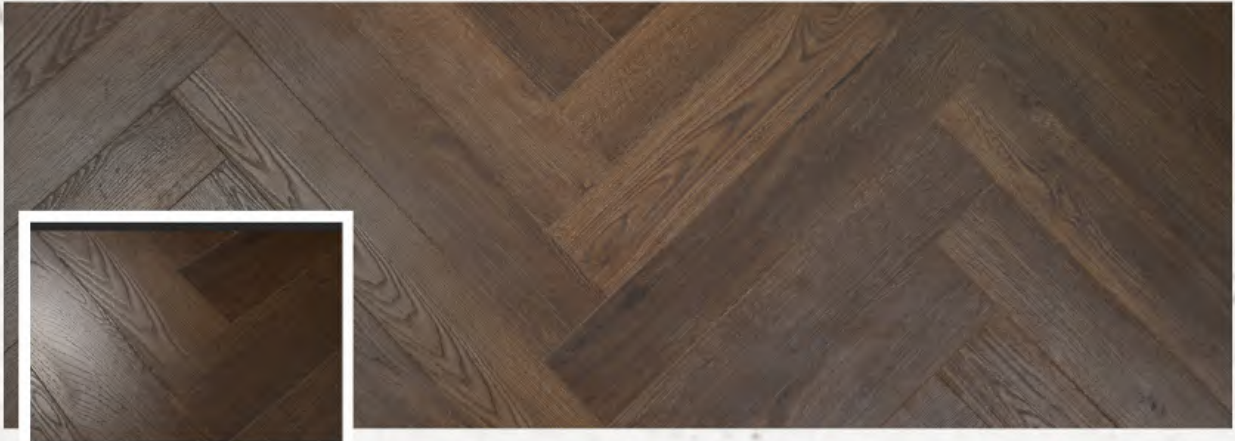

hb s6 | 6956 velvet dune

standard plank
8 x 100 x 600 mm


box
30 pcs | 19.38 ft²

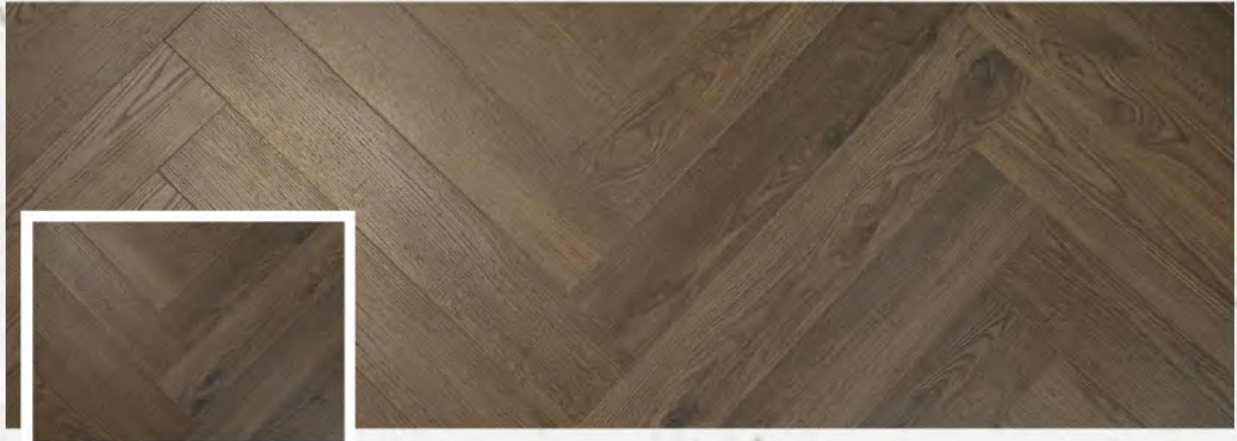

hb s6 | 6958 coastal grey

standard plank
8 x 100 x 600 mm


box
30 pcs | 19.38 ft²

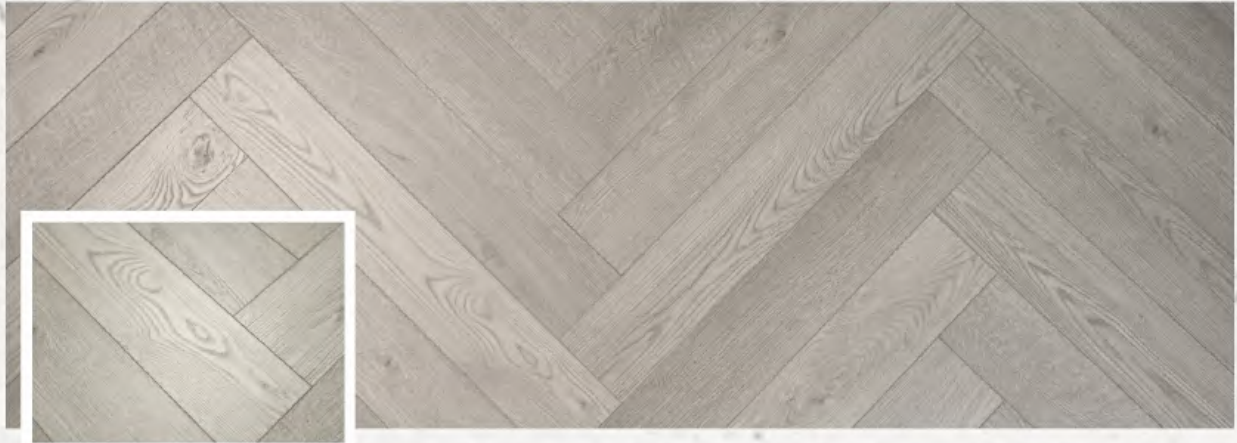


hb s6 | 6959 honey beige

standard plank
8 x 100 x 600 mm

box
30 pcs | 19.38 ft²

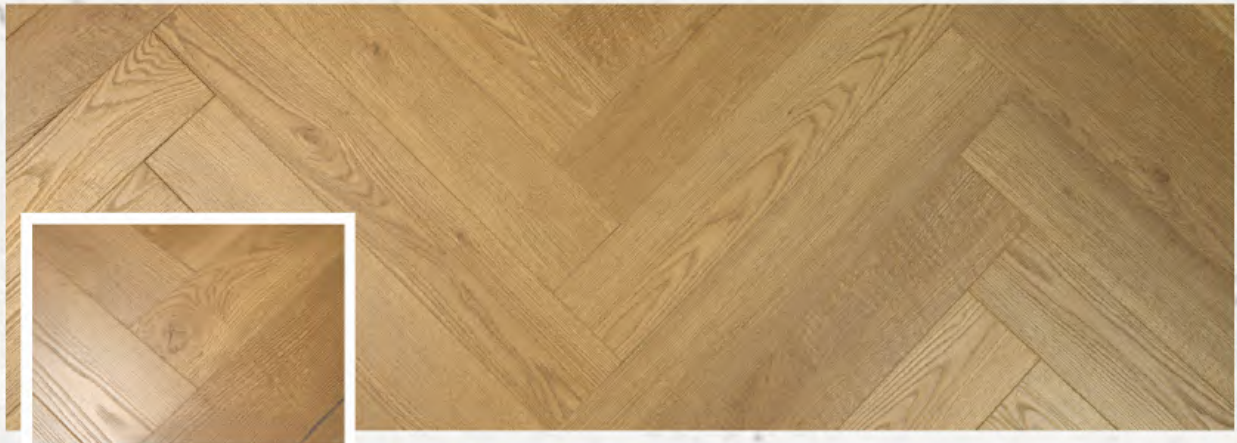

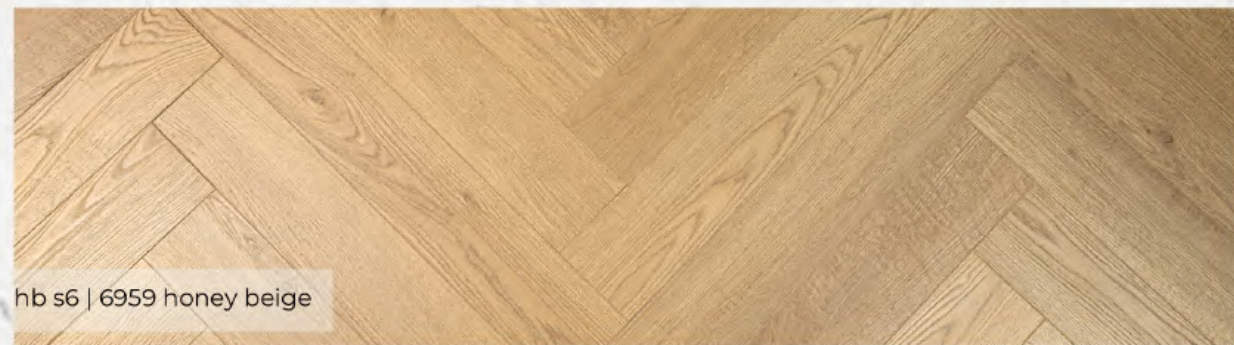

hb s6

by lamparke _____

technical data.

version 01/2026

	contains	m ²	ft ²
1 pack hb s6	30 planks	1.80 m ²	19.38 ft ²

product specifications

dimensions	600 x 100 mm
total thickness	08 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	33 general commercial use
Residential warranty	30 years*
Commercial warranty	3-5 years*

*conditions apply

composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC5 (IP≥6000)
impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
thickness swelling	24336 EN13501-1	≤ 18%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	E1
slip resistance	EN438	DS
density	EN16581 EN425	>850 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg		no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance		0,08 m ² K/W – suitable for floor heating/cooling.



laminate.

