

sens

by lamparke



forever stylish,
never boring

● ● ●
walk on art

beautiful moments

Authentic Wood Aesthetics


Immerse yourself in the beauty of our **matte, true-to-life wood decors**, crafted to mirror the elegance of real parquet. Every grain, knot, and shade has been meticulously selected by our experts to ensure unmatched authenticity.

Refined Elegance in a Narrow Plank

At **146mm wide**, our narrow planks are designed to bring a sense of **timeless charm and sophistication** to any space. Their sleek profile enhances the natural flow of wood patterns, creating a more detailed and refined look.



Discover the collection.

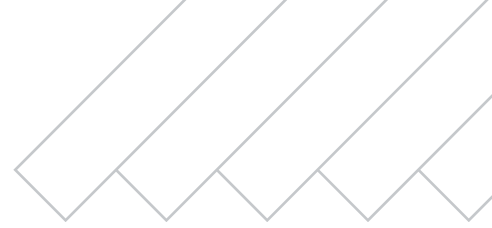

easy to maintain



easy to install



scratch resistant



compatible with underfloor heating



residential warranty 20 years



1218 x 146 x 8mm


Class 23/32 | AC4

Enjoy many beautiful moments with a floor that'll bring you a **step closer to nature.**


Taking craftsmanship a step further, we've created select designs using **high-definition scans of real wood**, capturing every grain and texture with stunning accuracy. The result? A floor that looks and feels as genuine as nature itself. **How incredible is that?**



3404
Canyon Shadow

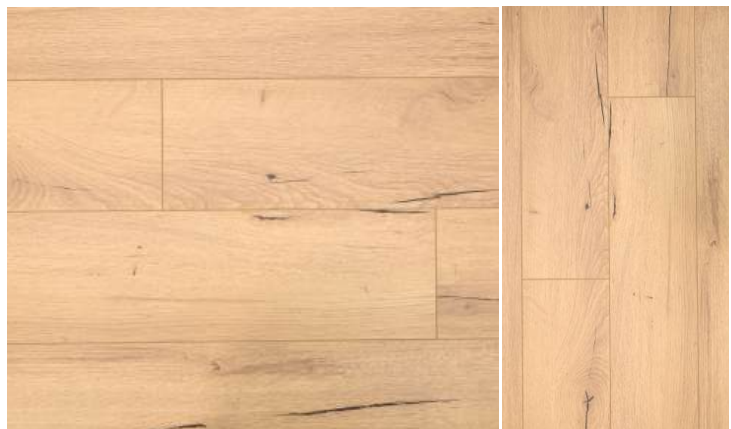

3490
Sandy Breeze






3480
Wild Mesa



3408
Serene Mist

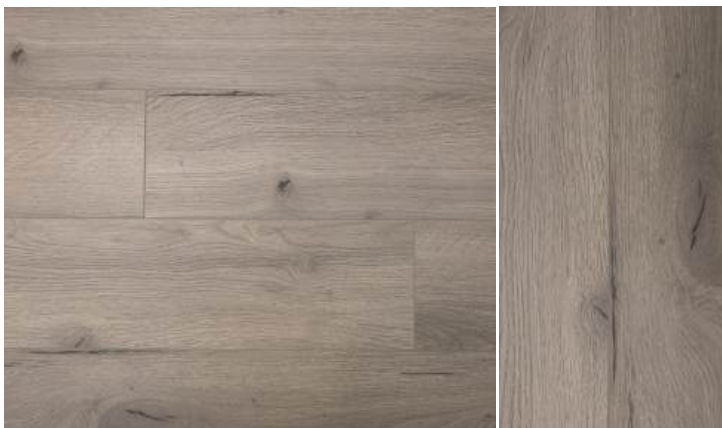

3419
Mystic Grey





3403
Golden Horizon




3410
Ember Glow




3412
Crimson Earth







3404
Canyon Shadow




3480
Wild Mesa




3490
Sandy Breeze




3408
Serene Mist




3419
Mystic Grey



3403
Golden Horizon



3410
Ember Glow



3412
Crimson Earth

sens

by lamparke _____

Technical data.

version 01/2025

	contains	m ²	ft ²	weight
1 pack sens	10 planks	1.78 m ²	19.14 ft ²	13.0 kg

product specifications

Dimensions	1218 x 146 mm
Total thickness	08 mm
Bevels	4
Click System	Unilin/Valinge
Level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years
Commercial warranty	3-5 years

composition

Surface layer	Direct laminated paper, impregnated with melamine resin.
Substrate	High Density Fiberboard (HDF).
Backing	Direct laminated paper, impregnated with melamine resin.

test results

Abrasion resistance	EN13329	AC4 (IP≥4000)
Impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
Thickness swelling	24336 EN13501-1	≤ 18%
Fire resistance	EN7 17-1	Cfl-S1
Formaldehyde emission	EN13893 EN323	E1
Slip resistance	EN438	DS
Density	EN16581 EN425	>850 kg/m ³
Resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg		no damage (foot type 0)
Effect of a castor chair		no damage with type W wheels
Thermal resistance in combination with underlay Excellence Plus		0,08 m ² K/W – Suitable for floor heating/cooling.



laminat.