

by lamparke —
walk on **art**

tretto

**elegance in every
grain.**

organic texture | refined finish | subtle hues | enduring quality

36h

SPILL PROTECT
hydrophobic coating

515 | purus





where gentle hues and natural grains converge—shaping a space that exudes serenity, connection, and a sense of belonging.



introduce a serene minimalism and a soft, flowing rhythm with the natural elegance of tretto's planks.

tretto brings nature's essence into every space, where rich grains and subtle tones merge in harmony.

each plank tells a story, grounded in earth's beauty, exuding quiet sophistication that elevates any room.

this is flooring that connects with the soul, inviting you to pause, reflect, and breathe in its elegance.

tretto creates more than just a floor—it creates an experience.

crafted to last, this beauty endures, capturing nature's grace with every step.

with usage class 32, abrasion class 4, and a **20-year residential warranty***, this is beauty that endures—even when life never slows.



527 | thames



fast installation

fast installation, no wait with our advanced click system, installation is effortless—just lock the planks in place and you're ready to use. enjoy immediate results with a seamless finish.



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.



healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality

advanced coating with exceptional **water resistance**



36h
SPILL PROTECT

hydrophobic coating technology is applied to the joints, enhancing the locking system's water resistance and preventing moisture intrusion.



36h

SPILL PROTECT



for intensive use
class 32 - AC4

4

4 bevels



eir



all year
comfort



20 years*

1219 x 198 x 8mm



1 box :
08 pcs., 20.78ft²


discover the collection.

a palette for every moment.

choose from a carefully crafted selection of shades, each one ready to shape your space.

whether it's the stillness of thames,
the quiet strength of purus,
the richness of mekong,
the boldness of volga,
or the depth of tigris—

your floor will carry a story,
more than just a design, but a part of you.

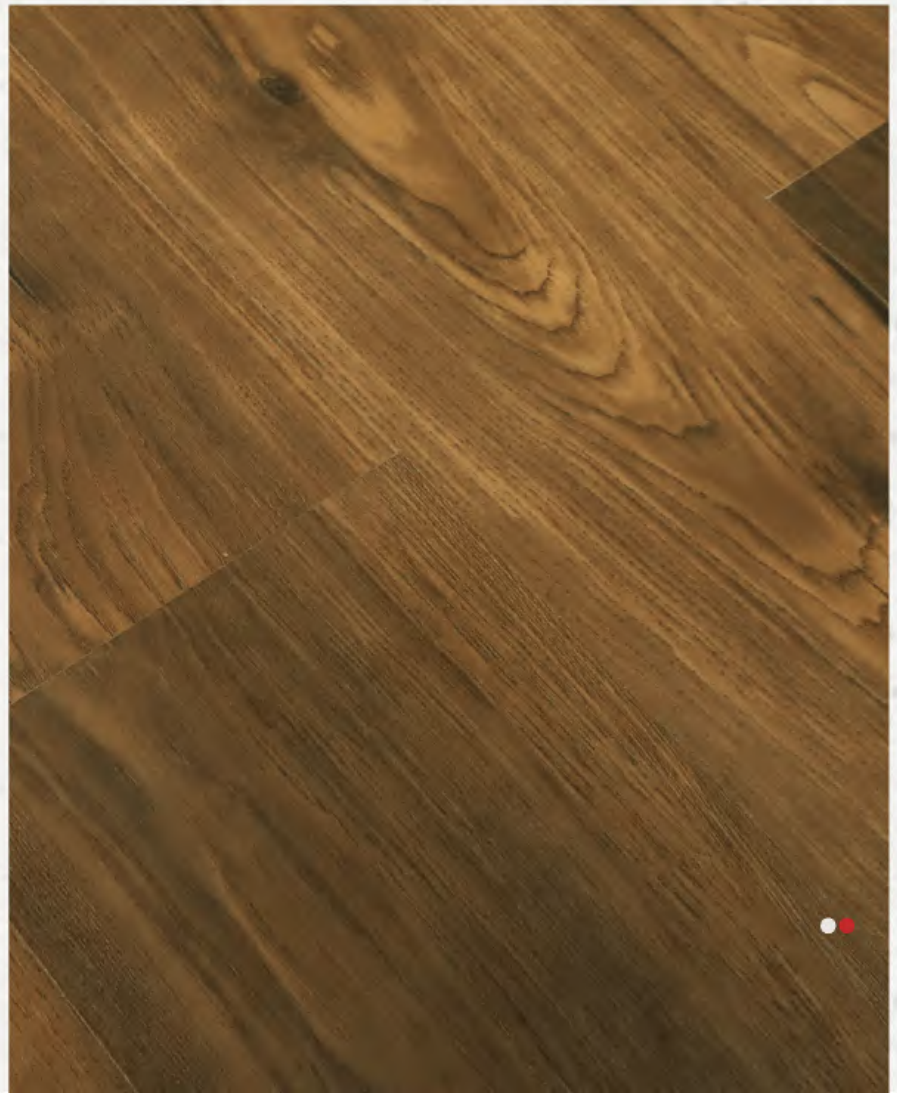

treto | tr527 thames

standard plank
8 x 198 x 1219 mm

box
08 pcs | 20.78 ft²



treto | tr514 tigris

standard plank
8 x 198 x 1219 mm

box
08 pcs | 20.78 ft²



treto | tr515 purus

standard plank
8 x 198 x 1219 mm

box
08 pcs | 20.78 ft²



treto | tr518 mekong

standard plank
8 x 198 x 1219 mm

box
08 pcs | 20.78 ft²



treto | tr525 volga

standard plank
8 x 198 x 1219 mm

box
08 pcs | 20.78 ft²






tr518 | mekong




tr515 | purus



tr514 | tigris

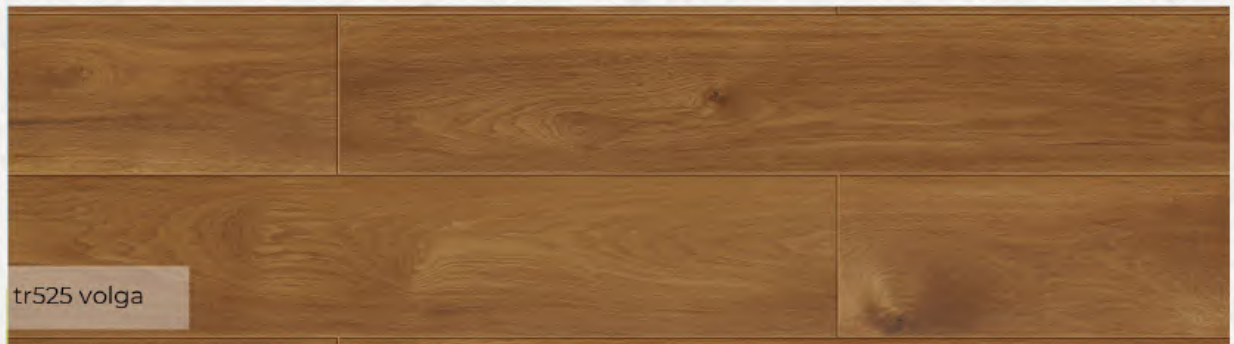

tr525 volga

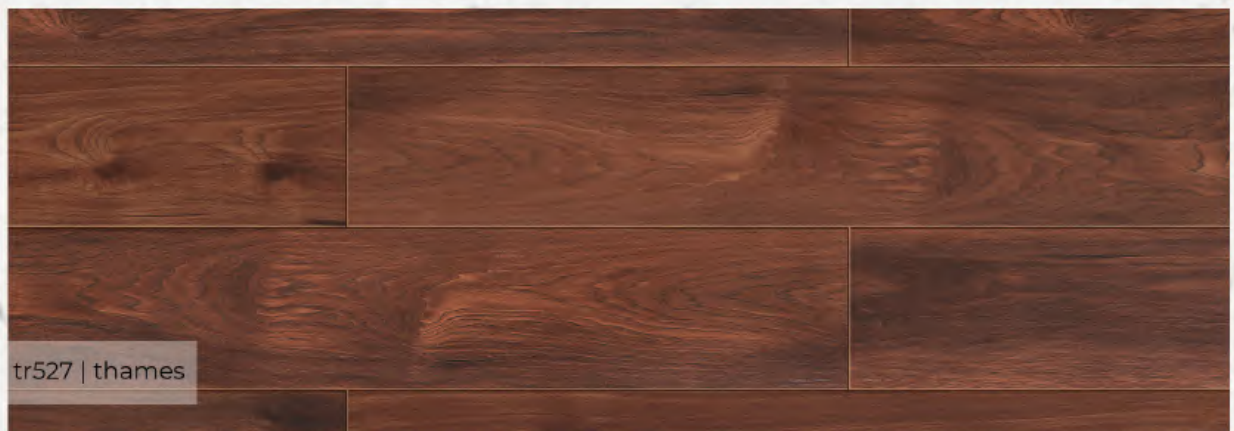

tr527 | thames

version 01/2025

1 pack tretto	contains	m ²	ft ²
	08 planks	1.931 m ²	20.78 ft ²

product specifications

dimensions	1219 x 198 mm
total thickness	08 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years*
Commercial warranty	3-5 years*

*conditions apply

composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC4 (IP≥4000)
impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
thickness swelling	24336 EN13501-1	≤ 18%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	E1
slip resistance	EN438	DS
density	EN16581 EN425	>850 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg		no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance		0,08 m ² K/W – suitable for floor heating/cooling.

laminatE.

